

Passenger car

Model 210



Customer:.....

Order number:.....

Current kilometer reading: _____

Remaining distance: _____

or

Remaining time: _____

Oil type/viscosity: _____


Footnote: _____

Correctness of service scope confirmed by service foreman:

Completion date

Completion of jobs confirmed by mechanic's signature:

i On vehicles with service indicator in the instrument cluster, the respective service scope is ticked off in the "Service category A" or "Service category B" fields

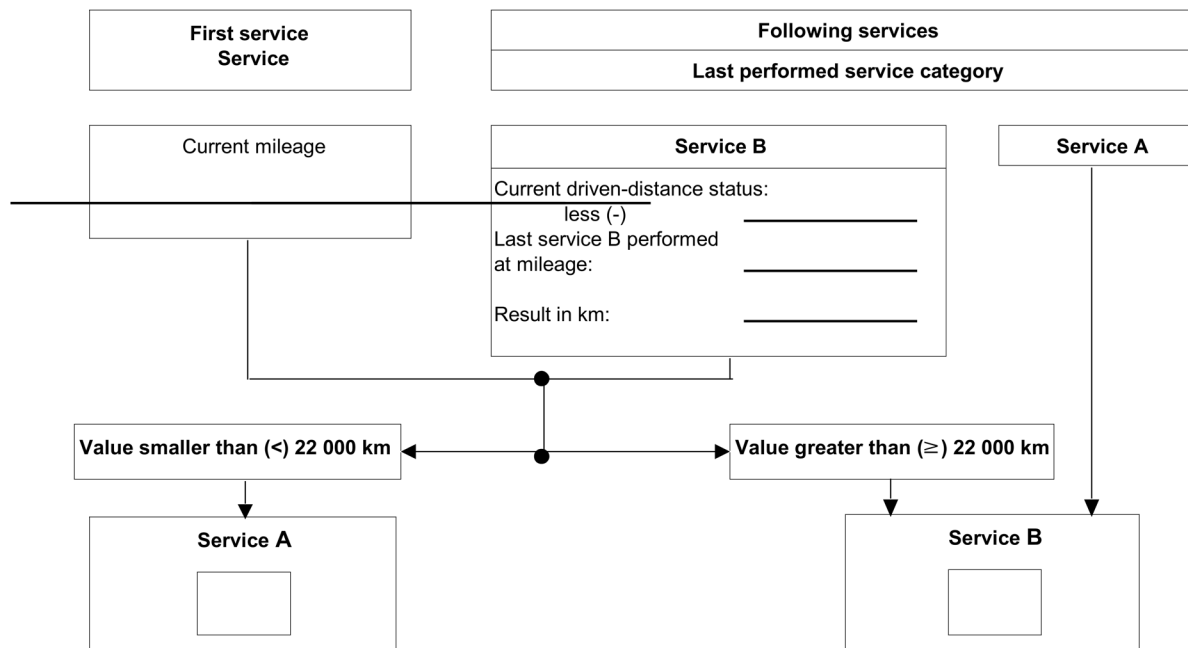

Customer interview conducted Yes

(Document inspection points immediately in service sheet)

No

Notes/explanations:

Modification notes

3.8.10	Header data on remaining distance/timer,simplified oil selection added		
3.8.10	Check bodywork for paintwork damage	Note "The country-specific rules ... apply " added	
3.8.10	Inspect chassis and load-bearing body parts for damage and corrosion	Note "The country-specific rules ... apply " added	

Additional operations

Completed

Perform: Yes

Not OK

At every service category B

<input type="checkbox"/>	Replace dust filter	<input type="checkbox"/>	with automatic air conditioning	AP83.00-P-8381S
With more than 30 000 km/2 years since last inspection				
<input type="checkbox"/>	Grease trailer coupling with removable ball hitch and automatic lock mechanism, then check operation	<input type="checkbox"/>		AP31.11-P-3121BB
<input type="checkbox"/>	Clean trailer coupling with removable ball hitch and automatic locking mechanism after testing (where necessary)	<input type="checkbox"/>		AP31.11-P-31302B
With more than 30 000 km/2 years since last replacement				
<input type="checkbox"/>	Replace fuel filter	<input type="checkbox"/>	Engine 611 with code (921) Rape seed oil operation, when operating with VOME fuel (vegetable oil methyl ester)	AP47.20-P-0780BB
With more than 50 000 km/2 years since last replacement				
<input type="checkbox"/>	Replace activated charcoal filter	<input type="checkbox"/>	with automatic air conditioning	AP83.00-P-8382F
With more than 80 000 km since the last check				
<input type="checkbox"/>	Check condition of flexible couplings	<input type="checkbox"/>		AP41.10-P-4152Z
If more than 80 000 km/4 years since last replacement				
<input type="checkbox"/>	Replace fuel filter	<input type="checkbox"/>	Engine 111	AP47.20-P-0780DB
			Engine 112, 113	AP47.20-P-0780DC
<input type="checkbox"/>	Replace fuel filter	<input type="checkbox"/>	Engines 602.98, 604, 605, 606	AP47.20-P-0780BA
			Engine 611 except code (921) Rape seed oil operation	AP47.20-P-0780BB
			Engine 611 with code (921) Rape seed oil operation when operating with diesel fuel	
			Engine 612, 613	
<input type="checkbox"/>	Replace fuel prefilter	<input type="checkbox"/>	Engine 605, 606	AP47.20-P-0781AB
<input type="checkbox"/>	Replace air-cleaner insert	<input type="checkbox"/>	All except engine 611, 612, 613 with maintenance indicator	
With more than 120 000 km/4 years since last replacement				
<input type="checkbox"/>	Replace air-cleaner insert (Reset maintenance indicator after replacing air-cleaner insert)	<input type="checkbox"/>	Engines 611, 612, 613 with maintenance indicator	AP09.10-P-0980B
More than 250 000 km/15 years since last replacement				
<input type="checkbox"/>	Replace coolant. Pay attention to coolant composition	<input type="checkbox"/>	Engine 112, 113 engine 111 as of VIN end no. A956413, X027839 Diesel engines	AP20.00-P-2080A AP20.00-P-2080BA
Every 2 years				
<input type="checkbox"/>	Replace brake fluid	<input type="checkbox"/>		AP42.00-P-4280BA
<input type="checkbox"/>	Check bodywork for paintwork damage	<input type="checkbox"/>	The country-specific rules for mobility and body shell complaints apply.	
		<input type="checkbox"/>	To be conducted by service advisor.	AP98.00-P-9850BA
<input type="checkbox"/>	Chassis panels and load-bearing body panels: Check for signs of damage and corrosion	<input type="checkbox"/>	The country-specific rules for mobility and body shell complaints apply.	
		<input type="checkbox"/>	Check visible area.	
		<input type="checkbox"/>	To be conducted by service advisor.	AP00.20-P-0090BA
Every 3 years				
<input type="checkbox"/>	Replace coolant. Note coolant composition	<input type="checkbox"/>	Engine 111 up to VIN end no. A956412, X027838	AP20.00-P-2080A
Every 5 years				
<input type="checkbox"/>	Tilting/sliding roof: clean slide rails and slide shoes	<input type="checkbox"/>		AP77.20-P-7731A
Replace spark plugs				
<input type="checkbox"/>	With more than 30 000 - 45 000 km/4 years since last replacement	<input type="checkbox"/>	Engine 111.947	AP15.10-P-1580CA

Note:
If the next service interval is expected to exceed 15 000 km, change before the specified lower limit

- With more than 50 000 - 70 000 km/4 years since last replacement** Engine 111 except 111.947 /957

AP15.10-P-1580C/A

Note:
If the next service interval is expected to exceed 20 000 km, change before the specified lower limit

- With more than 90 000 - 110 000 km/4 years since last replacement**

Engine 111.957
Engine 112, 113

AP15.10-P-1580C/A
AP15.10-P-1580A

Note:
If the next service interval is expected to exceed 20 000 km, change before the specified lower limit

Service

A

B

Not OK



Brake system: Perform brake test on test stand.
Enter brake values in kilonewton:



Observe notes in maintenance manual.

AP42.00-P-4290BA



Front Rear Parking brake

Left

Right

Vehicle interior



Function test

- | | | | |
|--------------------------|--------------------------|--|--|
| <input type="checkbox"/> | <input type="checkbox"/> | Horn, headlamp flasher, hazard warning flasher, turn signal indicators | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | Indicator lamps, symbol illumination and interior illumination | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | Front and rear lights | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | Windshield wipers, rear window wiper, windshield washer system | <input type="checkbox"/> AP82.35-P-8252BA |
| <input type="checkbox"/> | <input type="checkbox"/> | Headlamp cleaning system | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | Check seat belts and seat belt buckles for external damage and | <input type="checkbox"/> AP91.40-P-9150Z |
| <input type="checkbox"/> | <input type="checkbox"/> | Reset service indicator in instrument cluster | |
| <input type="checkbox"/> | <input type="checkbox"/> | Replace dust filter | without automatic air conditioning and Tempmatic (air conditioning) <input type="checkbox"/> AP83.00-P-8381F |
| <input type="checkbox"/> | <input type="checkbox"/> | Replace combination filter | with Tempmatic (air conditioning) <input type="checkbox"/> AP83.00-P-8381F |
| <input type="checkbox"/> | <input type="checkbox"/> | Check and correct fluid level | |
| <input type="checkbox"/> | <input type="checkbox"/> | Check and correct battery fluid level | <input type="checkbox"/> AP54.10-P-5410A |



Except with maintenance free battery.

Wheels, brakes



- | | | |
|--------------------------|---|---|
| <input type="checkbox"/> | Remove/install wheels, rotate tires if necessary (except vehicles with different tires of varying specifications) | <input type="checkbox"/> AP40.10-P-4050Z |
| <input type="checkbox"/> | Check brake pads for lining thickness, front and rear | <input type="checkbox"/> AP42.10-P-4253AM |
| <input type="checkbox"/> | Check thickness and condition of brake disks, front and rear | <input type="checkbox"/> AP42.10-P-4258AM |
| <input type="checkbox"/> | Check tires for damage and crack formations | <input type="checkbox"/> AP40.10-P-4051Z |
| <input type="checkbox"/> | Measure tread depth, enter in millimeter: | <input type="checkbox"/> AP40.10-P-4051Z |


outside

center

inside

- Correct the tire inflation pressure and enter in bar or psi
- Front axle Rear axle
- bar/psi

Underside of vehicle




- Check all visible parts for leaks and damage. In the event of fluid loss, determine cause and correct subject to separate repair order AP00.20-P-0053BA
- Check front axle ball joint for play, check rubber boots AP33.20-P-3353BA
- Check track rod and drag link linkage for play, check rubber boots AP46.00-P-4653F

Engine compartment



- Check all visible parts for leaks and damage. In the event of fluid loss, determine cause and correct subject to separate repair order AP00.20-P-0053BA
- Engine oil and filter change
- | | | |
|--|------------|------------------|
| | Engine 111 | AP18.00-P-0101AD |
| | Engine 112 | AP18.00-P-0101AE |
| | Engine 113 | AP18.00-P-0101AF |
| | Engine 602 | AP18.00-P-0101AK |
| | Engine 604 | AP18.00-P-0101AL |
| | Engine 605 | AP18.00-P-0101AM |
| | Engine 606 | AP18.00-P-0101AN |
| | Engine 611 | AP18.00-P-0101AO |
| | Engine 612 | AP18.00-P-0101AR |
| | Engine 613 | AP18.00-P-0101AS |
- Check and correct fluid level**
- Engine cooling system, anticorrosion/ Antifreeze AP20.00-P-2010Z
- °C
- Level control system, ADS AP32.30-P-3211BB
- Brake System AP42.10-P-4210Z
- Power steering AP46.00-P-4611BB
- If fluid loss is discovered, ascertain and rectify the cause as a separate repair order
- Windshield washer system (incl. summer/winter cleaner) AP82.35-P-8210Z
- Check visible area of poly-V belt for wear AP13.22-P-1352Z
- Lubricate joints of engine control system, check joints for ease of movement and proper seating AP30.10-P-3022ZA
- Lubricate engine hood latch and hinges. Grease latch hook, check for smooth movement AP88.40-P-8821BA

Vehicle front end, vehicle rear end




- Check headlamp range adjustment system not with Xenon headlamps AP82.10-P-8260A
- Check, correct headlamp setting (with xenon headlamps, correct subject to separate repair order) AP82.10-P-8260A

Check wiper blades, if necessary as a separate job

AP82.30-P-8253G

Trunk



Correct the tire inflation pressure of spare tire and enter in bar or psi

bar/psi

Check trunk lighting

MODEL 124 as of 1.7.93
MODEL 129 as of 1.7.93 up to 31.5.97
MODEL 140 as of 1.7.93 up to 31.5.97
MODEL 202 up to 31.5.97
MODEL 210 up to 28.2.97
MODEL 170 up to 31.5.97
 Wartungsdienst nach 15 000 km/jährlich

Passenger vehicles



Customer: _____

Order number: _____

Note: Separate work units are valid for the scope of work identified by AP.

Confirm that work has been completed by signing

Initial condition not OK

Operation item No.

Mechanic: _____



Modification notes

12.1.05	Vehicle front, vehicle rear	Check wiper blades, replace if necessary as a separate order added	AP82.30-P-8253G
---------	-----------------------------	--	-----------------

Vehicle interior



Function test

- | | | |
|--------------------------------------|--|---|
| <input type="checkbox"/> | Signaling system | <input type="checkbox"/> |
| <input type="checkbox"/> | Horn, headlamp flasher, turn signals, hazard warning light | <input type="checkbox"/> |
| <input type="checkbox"/> | Indicator lamps, symbol lighting and interior lights | <input type="checkbox"/> |
| <input type="checkbox"/> | Front and rear lights | <input type="checkbox"/> |
| <input type="checkbox"/> | Windshield wipers, rear window wiper | <input type="checkbox"/> AP82.35-P-8252BA |
| <input type="checkbox"/> | Windshield washer system | <input type="checkbox"/> AP82.35-P-8252BA |
| <input type="checkbox"/> | Headlamp cleaning system | <input type="checkbox"/> AP82.15-P-8252BA |
| Check and correct fluid level | | |
| <input type="checkbox"/> | Battery | Model 210 <input type="checkbox"/> |

Wheels



- | | | | | | | | |
|--------------------------|--|--------------------------|-----------------|----|----|--------------------------|-----------------|
| <input type="checkbox"/> | Check tires for damage and cracks | <input type="checkbox"/> | AP40.10-P-4051Z | | | | |
| <input type="checkbox"/> | Measure tread depth, enter in mm: | FL | FR | RL | RR | <input type="checkbox"/> | AP40.10-P-4051Z |
| | outer | — | — | — | — | | |
| | center | — | — | — | — | | |
| | inner | — | — | — | — | | |
| <input type="checkbox"/> | Adjust tire inflation pressure to correct pressure incl. spare wheel | | | | | <input type="checkbox"/> | |

Engine compartment



- | | | | |
|--------------------------------------|---|-----------------------------------|--|
| <input type="checkbox"/> | Engine oil and filter change | | AP18.00-P-0101AA |
| <input type="checkbox"/> | Reset reminder indicator | Model 170 | <input type="checkbox"/> |
| Check and correct fluid level | | | |
| <input type="checkbox"/> | Battery | Model 170, 124 except 124.034/036 | <input type="checkbox"/> |
| <input type="checkbox"/> | Engine cooling system, anticorrosive/antifreeze | _____ °C | <input type="checkbox"/> AP20.00-P-2010Z |
| <input type="checkbox"/> | Brake system | | <input type="checkbox"/> AP42.10-P-4210Z |
| | In the event of fluid loss, determine cause and correct subject to separate order | | |
| <input type="checkbox"/> | Windshield washer system | | <input type="checkbox"/> AP82.35-P-8210Z |

- Lubricate lock and hinges of hood, oil locking hook and inspect ease of operation. Except model 202 (Replace components no matter how insignificant the defect).

AP88.40-P-8821BA

- Inspect engine hood lock and safety hook Model 202

AP88.40-P-8851BA

**Additional operation
Only 4MATIC models, once at
15 000 Km**

- Relieve engine stop

- AP22.10-P-2291AA




Vehicle front end, vehicle rear end



- Check wiper blades, replace if necessary as a separate order

- AP82.30-P-8253G

Trunk



Check and correct fluid level

- Battery Model 124.034/036, 129, 140, 202

-