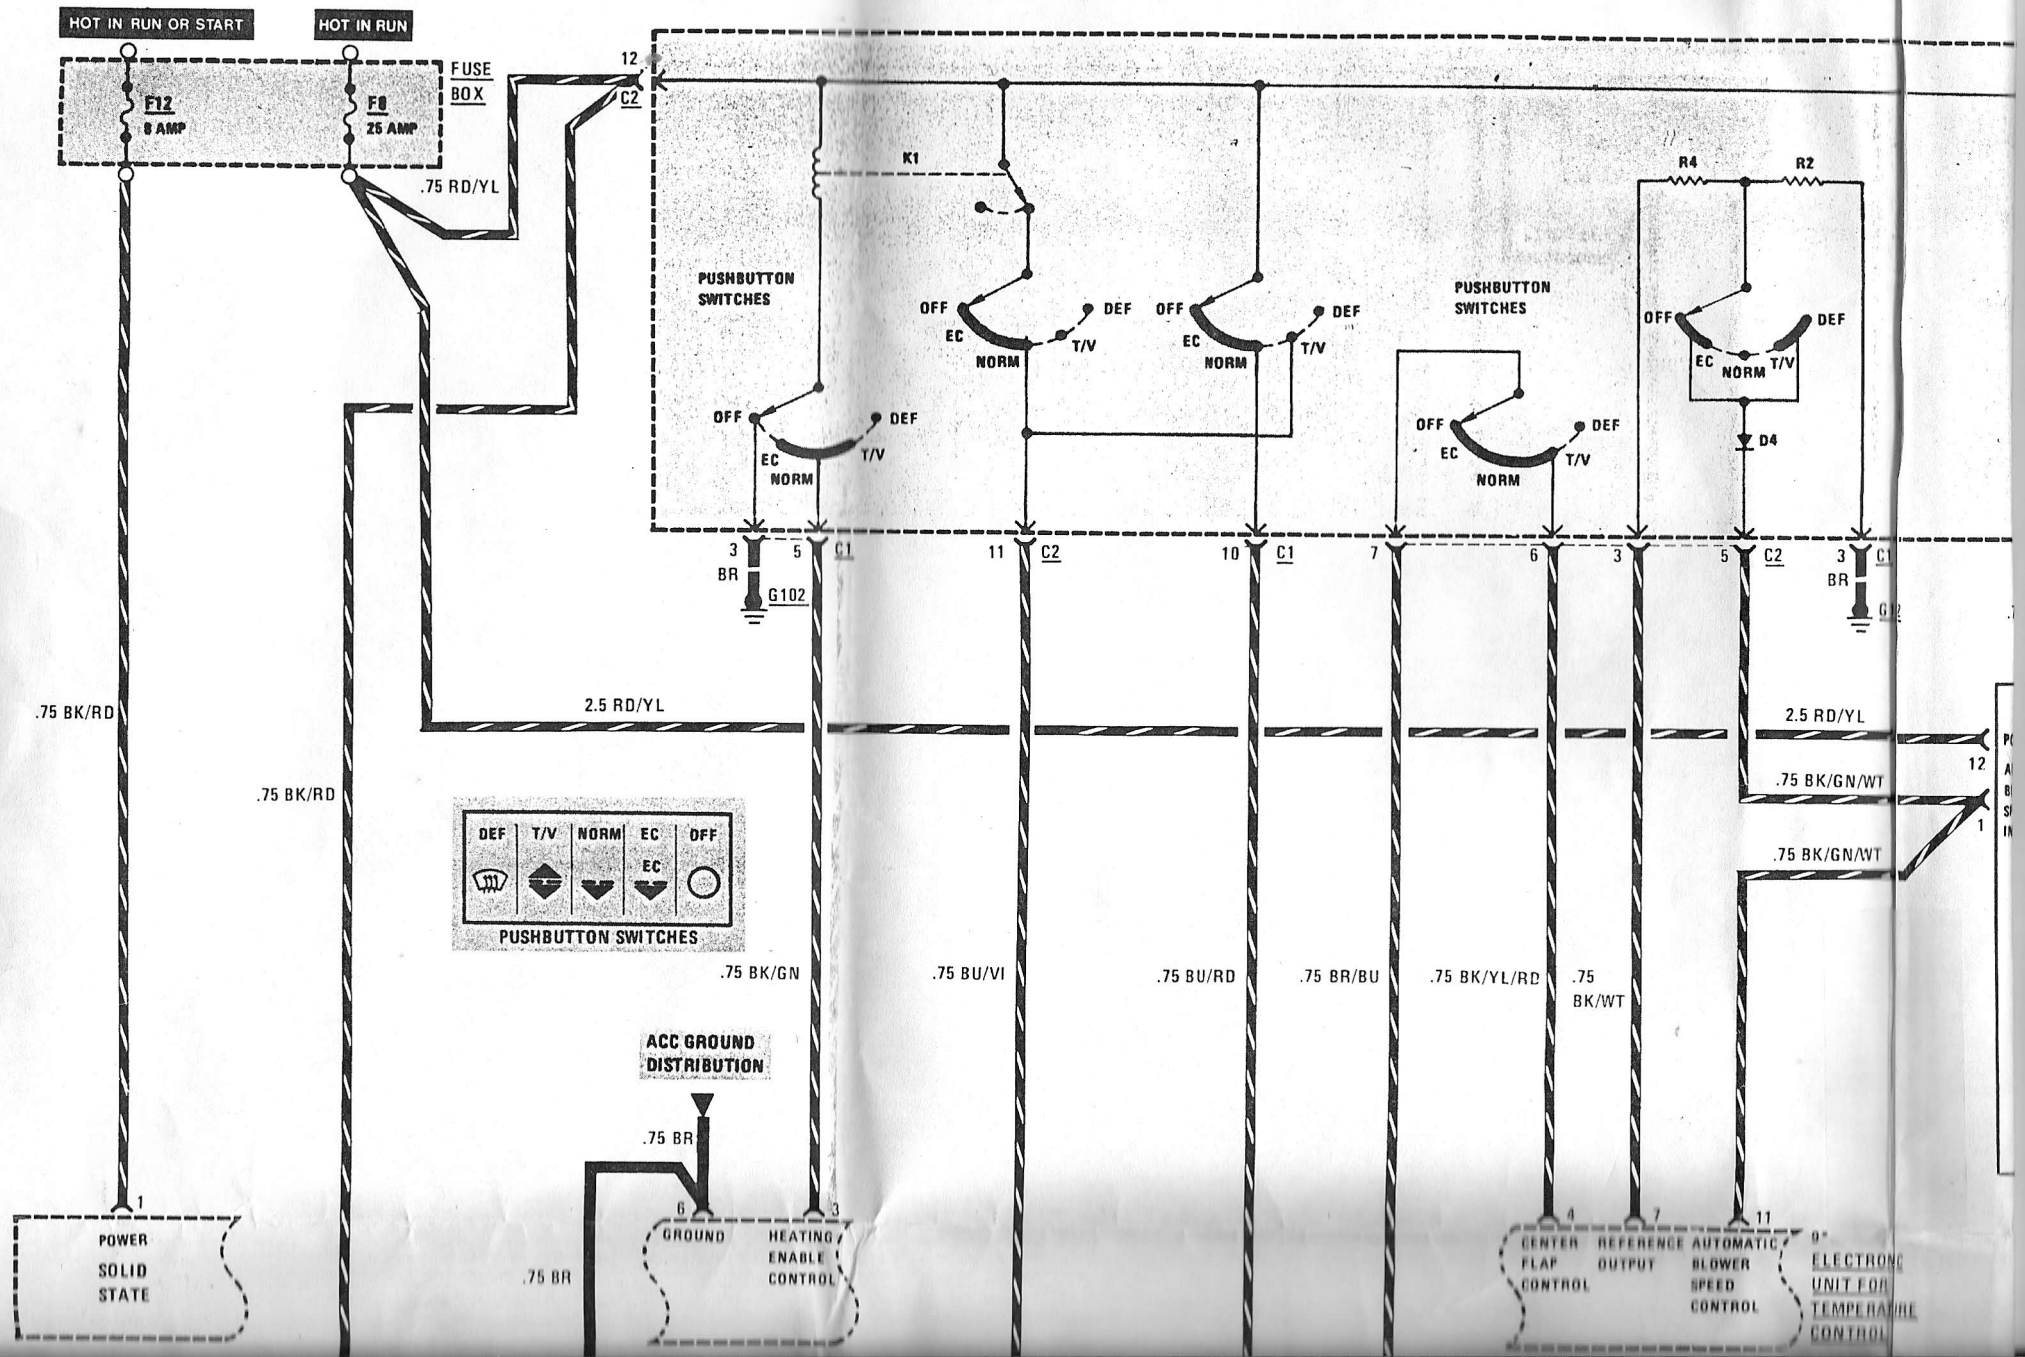
HOT IN RUN OR START
HOT IN RUN
FUSE BOX
F12
8 AMP
F8
25 AMP
12
C2
.75 RD/YL
K1
PUSHBUTTON SWITCHES
OFF
DEF
EC
NORM
T/V
R4
R2
D4
3
BR
5
C1
G102
11
C2
10
C1
7
6
3
5
C2
3
C1
2.5 RD/YL
.75 BK/RD
.75 BK/GN/WT
.75 BK/GN
.75 BU/VI
.75 BU/RD
.75 BR/BU
.75 BK/YL/RD
.75 BK/WT
DEF
T/V
NORM
EC
OFF
PUSHBUTTON SWITCHES
ACC GROUND DISTRIBUTION
.75 BR
POWER SOLID STATE
GROUND
HEATING ENABLE CONTROL
CENTER FLAP CONTROL
REFERENCE OUTPUT
AUTOMATIC BLOWER SPEED CONTROL
ELECTRONIC UNIT FOR TEMPERATURE CONTROL