



A. Standard equipment

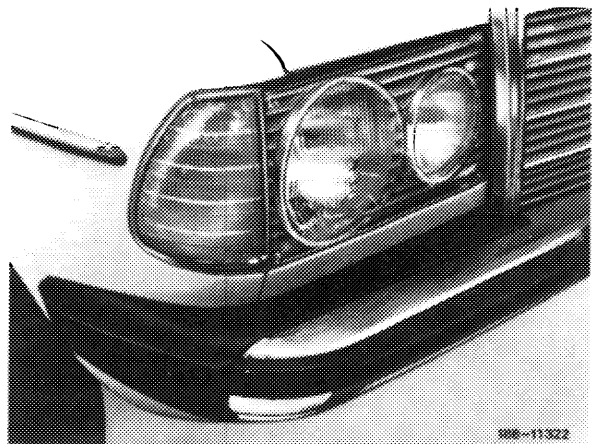

**Removal**

---


- 1 Unscrew nut at left and right on bracket and pull out bumper including bracket in forward direction.

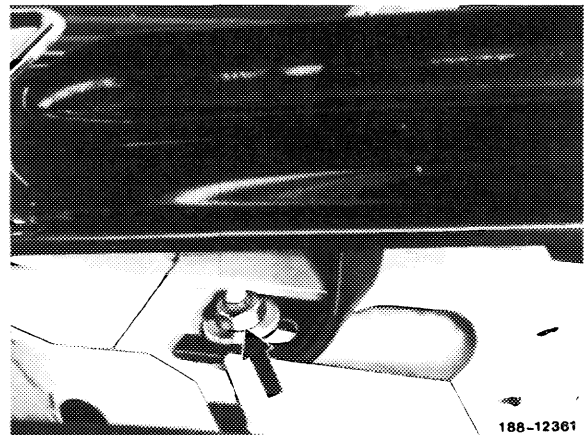


**Installation**

---

- 2 Moisten lateral rubber cover with soapy water or the like.
- 3 Introduce bumper into guide bracket in rubber cover.
- 4 Position the two fastening nuts and tighten.

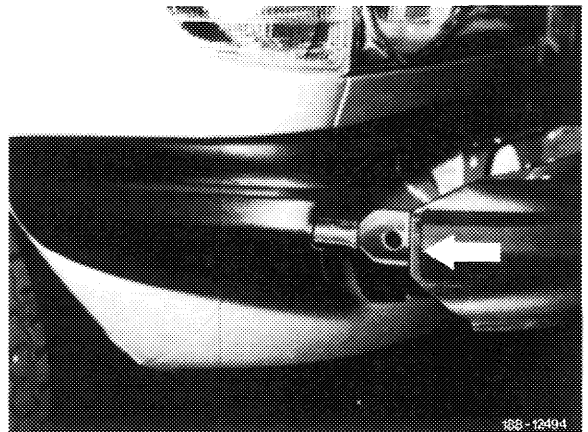

## B. De-luxe equipment

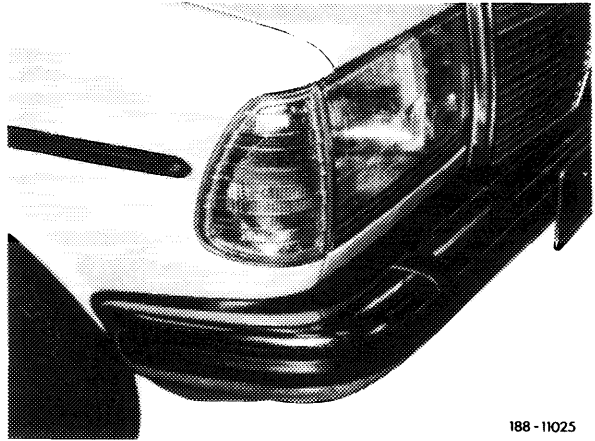


188 - 11025

### Removal

---

- 1 Unscrew nut at left and right on bracket and pull out bumper including bracket in forward direction.

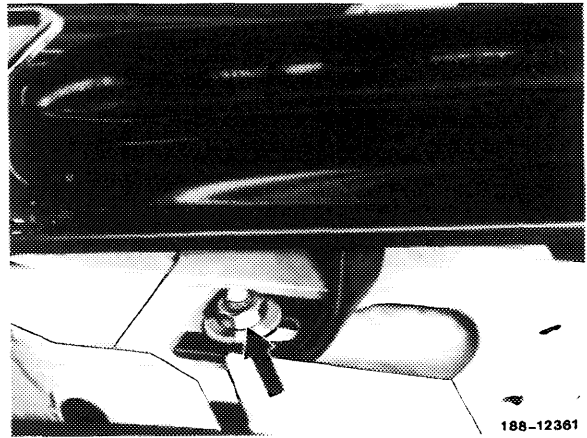


188-12361

### Installation

---

- 2 Introduce bumper into guide bracket laterally on front fender.
- 3 Position the two fastening nuts and tighten.

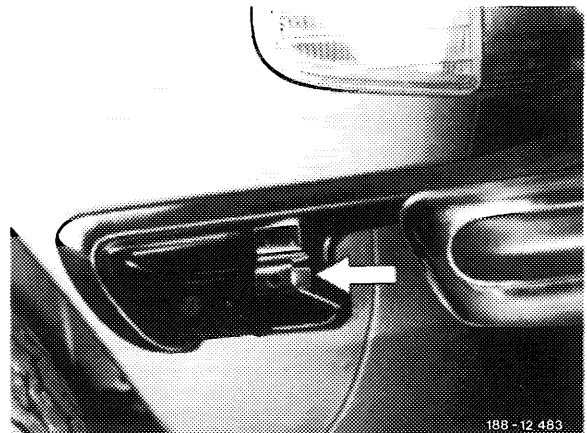

188 - 12 483